



HR[®]
**AYUDA AL
SERVICIO**

INVERTER CATALOG
2008

Ref. orig.	HR	Panel LCD	Marca/Brand	Model.
INVERTERS 4 LAMPARAS				
FIF1742-57A GH116A 19-4003C	I04L10002	SAMSUNG LTM190E1-L01/02/03 LTM19E4-L01/02		
		SHARP LQ150XLGB1/LW71		
FIF1742-57B 1942-32D	I04L10003	SAMSUNG LTM190EX-L01/05/21 LTM550V1		
		AUOPTRONICS M170EG01/EN07 M190EG01/02 M190EN02/03/04 T150XG01		
GH053A(A2) GH027A GH027A(A3) FIF1742-31C FIF1742-34B	I04L10004	SAMSUNG LTM170EU-L01/11/21 LTM170EX-L01 / LTM170E4/E5/E6/E8	PHILIPS	CH. LC4.1E AB
		LG-PHILIPS LC130V01-A2 / LM190E3 LC150X01-C3/X02-A4 LM170E01-A4/TLA1 / LM171W01		
		SHARP LQ150X1LGB1 / LQ150X1LW71		
GH027I FIF1542-31B 30018343 30041724	I04L10005	SAMSUNG LTM150XH-L01/L06 LTM170XH-L01/06/T01	PHILIPS	13PF7835
		LG-PHILIPS LC130V01-A2 LC150X01-C3/X02-A4		
		CHIMEI M150X3-L04/06 - V150X1L06 /X2T06 LQ150X1LGB1 / LQ150X1LW71		
		SHARP LQ150X1LW71/N		
		HYDIS HT15X13-100		
GH140A(A1) GH017 GH017A3 3373400 PLCD2615412	I04L10007	SAMSUNG LTM150XH-L01/06A LTM170EH-L05	PHILIPS	13PF7835
		LG-PHILIPS LC130V01-A2 LC150X01-C3/X02-A4		
		CHIMEI M150X3-L04/06 - V150X1L06 /X2T06 LQ150X1LGB1 / LQ150X1LW71		
		SHARP LQ150X1LW71/N		
		HYDIS HT15X13-100		

GH053A(A6) FIF1542-02 9965 000 17796	I04L10010	SAMSUNG LTM170EX-L21 / LTM190EX-L21/31 LTM170W1 / LTM550V1	PHILIPS 15FT9955
		LG-PHILIPS LM190E05-SL01/03 QD14VL03-01	
		AUOPTRONICS M170EN01/02/03/04 - M170EG01/02/04 M190EG01/02/04	
		NEC 170SX01TB	
		HANNSTAR HSD190ME12/13	
FIF1942-67A	I04L10014	SAMSUNG LTM170EX-L01 - LTM170EU-L01/11/21/25 LTM170E06-L02/04 - LTM190EXL01/05/21	
		LG-PHILIPS LM170E01/02 - LM171W01 LM190E03/04/05 - LM190WX1-TLA1	
		CHIMEI M170EG01-V0 M190EN02/03/04	
		HYDIS HT17E11-200/300 - HT17E12/13	

INVERTERS 6 LAMPARAS

FIF1766-31A GH103A 30041927 30029602	I06L10001	LG-PHILIPS LC171W03-A4/B3 LM171W03-A04 LC150X01-SL01/A3	JVC JVC JVC JVC	LT17B60 LT17C50 LT17D50 LT17E31
		LG-PHILIPS LC150X01-A3		
		FUJITSU FLC48SXC8V-05 FLC48SXC8V-12 / F SHARP LQ190E1LW41		
		AUOPTRONICS A201SN02		
GH164A DA2604-02	I06L20002	SAMSUNG V201V1-T01	PHILIPS GRUNDIG GRUNDIG JVC	20PF4121 LCD51-4505 LCD51-6605 LT20E50
		NEC NL128102BC28/29 - NL16010BC27-02/03		
		CHUNGHWA CLAA201VA07		
		SHARP LQ181E1LW31 LQ210U1LW11		

		AUOPTRONICS A201SN01-V5 / A201SN02-V4 T200XW02-V0	
FIF2064-31B	I06L20003	SAMSUNG LTM201U1-L01 LTM201M1-L01	
		LG-PHILIPS LM190E01-A4/SL01 - LM190E02-B4 LM190E05-SL02 - LM201W01-A5/B5 LC201V2-A3/SD02	
GH089A DA6303-01 FIF2066-31A	I06L20004	SAMSUNG LTM210M2-L01 LTM213U6-L01	
		LG-PHILIPS LC201U02 - LC201V01/02 LM190E01/E05 LM201U03/04 - LM201V02-A3	
		AUOPTRONICS M201EW01 M201UN02	
		NEC 201VBTB	
GH158A FIF2066-01A	I06L20007	SAMSUNG LTM201U1-L01 LTM213U6-L01	
FIF2066-51C FIF2066-51D	I06L20009	SAMSUNG LTM213U3 / U4 / U5	SAMSUNG
QF131V1.00	I06L20012	AUOPTRONICS A201SN01-V5 / A201SN02-V4	SANYO CE 20 L01 WELTSTAR 20 LF1T
		CHIMEI V201V1-T01	VESTEL CH.17SC.07-2
LIVP6009 30045614 PLCD0318604 LVE0321	I06L20014		JVC LT20E50 LT20A5S
			VESTEL
LIVP6010 30045615	I06L20015		VESTEL
BI2036C	I06L20019	AUOPTRONICS	SOGO SS2002
		CHIMEI	
INVERTERS 10 LAMPARAS			
VIT70008.50 27-D000466	I10L20001		

INVERTERS 12 LAMPARAS

GH151A GH214A BN44-00136A	I12L20002	SAMSUNG LTA240M1-L02 LTM240M1-L01/02 LTM240M2-L01/02	SAMSUNG
GH194A LJ97-00863A	I12L20003	SAMSUNG LTA230W-L02 LTA230W1-L02 /04 /07	SAMSUNG LA23R51B LE23R41B LE23R51B CH.RE23
GH199A LJ97-00942A	I12L20004	SAMSUNG LTA260W3-L03 LTM260W3-L03	SAMSUNG LA23R51B LE23R41B LE23R51B CH.RE23
GH212A LJ97-01069A	I12L20005	SAMSUNG LTA230W2-L01 LTA230W2-L0100R7	SAMSUNG
FIF2412-32A	I12L20006	SAMSUNG LTM240CT01 LTM240M1-L01/02 LTM240M2-L02 AUOPTRONICS LTM240M1-L01/02 LTM240M2-L01/02	SAMSUNG
VIT71007.50 19.26006.063	I12L20007		

INVERTERS 14 LAMPARAS

VIT79005.81 19.26006.288	I14L20001	QDI V26D3	
VIT79002.52 19.26006.286	I14L30001	QDI V32C5 V32C1-CD	
VIT79002.62 19.26006.137	I14L30002	QDI V32C5 V32C1-CD	

INVERTERS 16 LAMPARAS

GH178A LJ97-00732C	I16L20001	SAMSUNG LTM270M1-L01	SAMSUNG
VIT71008.90 19.26006.111	I16L20002	AUOPTRONICS T260XW02	
VIT71008.91 19.26006.167	I16L20003		
VIT71008.92 19.26006.187	I16L20004		

GH169A GH169C LJ97-01265A	I16L30001	SAMSUNG LTM300M1-P01	SAMSUNG
VIT79001.52 19.26006.301	I16L30004	QDI V32C1 V32D2	
VIT68001.80 4H.V1448.451/C1	I16L30005	CHUNGHWA CLAA320WF01T CLAA320WB02S	SAMSUNG LE32S62B
VIT68004.70 4H.V1838.491/B1	I16L30006	CHUNGHWA CLAA370WF01 CLAA370WA03S	SAMSUNG LE37S62B

INVERTERS 18 LAMPARAS

VIT79006.60 19.26006.294	I18L30001	AUOPTRONICS V37A1	
-----------------------------	------------------	----------------------	--

INVERTERS 20 LAMPARAS

VIT71010.53 19.26006.146	I20L30001	AUOPTRONICS T370XW01	
VIT70006.60 27-D005816	I20L30002	CHIMEI V370H1-24A	
VIT70006.80 27-D015041	I20L30003	CHIMEI V370H1-L0A	
VIT70023.50/51 27-D005861	I20L40001	CHIMEI V420H1-L24	
VIT70023.60/61 27-D013345	I20L40002	CHIMEI V420H1-20C	
VIT70023.70/71 27-D010636	I20L40003	CHIMEI V420H1-20A	

POWER INVERTER 2 LAMPARAS

AI0021A 3138 188 79062	IP2L10001	LG-PHILIPS	PHILIPS
AI0067A 3138 198 74361	IP2L10002	LG-PHILIPS	PHILIPS
AIP0097A 3138 198 76371	IP2L10003	LG-PHILIPS	PHILIPS

POWER INVERTER 4 LAMPARAS

AIP0093 3138 198 75863	IP4L10001	LG-PHILIPS	PHILIPS
AIP0095 FE572A306A0001	IP4L10002	LG-PHILIPS	LG
AI0031F	IP4L10006	LG-PHILIPS	LG

FE5319C249G0885			VESTEL
AIP0105N	IP4L10007	LG-PHILIPS	LG
FE6427A324N0406			VESTEL

POWER INVERTER 6 LAMPARAS

AIV0001A	IP6L20001	LG-PHILIPS	PHILIPS	
FE7025O280K1075				
AIVP0010	IP6L20002	LG-PHILIPS	LG	
FE5N03C319A				
AIVP0026 / C	IP6L20003	LG-PHILIPS	SANYO	CE20LD51C
30051308		SAMSUNG	VESTEL	CH.17MB24-3
30057403				
AIV0006C	IP6L20004	LG-PHILIPS	LG	
FE6406A280G0179				
AIV0009A	IP6L20005	LG-PHILIPS	PHILIPS	
FE7026N280Q0161				
AIVP0032A	IP6L20006	LG-PHILIPS	VESTEL	
E7ND0326364020033				
AIP0110A	IP6L20009	LG-PHILIPS	LG	
FE7425A325A0070				

POWER INVERTER 16 LAMPARAS

AIVP0035A	IP16L30001	AUOPTRONICS	VESTEL
30053669		CHUNGHWA	

INVERTER ORIGINAL REFER. EQUIVAL.
FIF1742-57A
GH116A
FIF1942-32C



Dimensiones / size : 160mm x 26mm

Conector Control / Control Connector											
12	11	10	9	8	7	6	5	4	3	2	1
12V	12V	12V	GND	GND	N.C.	GND	GND	on-off	GND	Bri.	GND

LCD panel manuf.	LCD Panel cod.
SAMSUNG	LTM190E1-L01/02/03 LTM190E4-L01/02 LTM170EU-L01 / LTM170EX-L01
SHARP	LQ150X1LGB1/LW71
CHIMEI	M170E06-L02 / M190E02-L01

Marca / Brand	Model

Observaciones / Remarks

HR I04L10003



INVERTER ORIGINAL REFER. EQUIVAL.
FIF1742-57B
FIF1942-32D



Dimensiones / size : 160mm x 26mm

Conector Control / Control Connector											
12	11	10	9	8	7	6	5	4	3	2	1
12V	12V	12V	GND	GND	N.C.	GND	GND	on-off	GND	Bri.	GND

LCD panel manuf.	LCD Panel cod.
SAMSUNG	LTM190EX-L01/05/21 LTM550V1
LG-PHILIPS	LM190E01-A4 / C4
AUOPTRONICS	M190EG01/EN07 - M190EN02/03/04 M170EG01/EN07 - T150XG01

Marca / Brand	Model

Observaciones / Remarks

HR I04L10004



INVERTER ORIGINAL REFER. EQUIVAL.
GH053A(A2) - GH027A
FIF1742-31C
FIF1742-34C



Dimensiones / size : 160mm x 26mm

Conector Control / Control Connector											
12	11	10	9	8	7	6	5	4	3	2	1
12V	12V	12V	GND	GND	N.C.	GND	GND	on-off	GND	Bri.	GND

LCD panel manuf.	LCD Panel cod.
SAMSUNG	LTM170EU-L01/11/21
	LTM170E4-E5/E6/E8 - LTM170EX-L01
SHARP	LQ150X1LGB1 - LW71
LG-PHILIPS	LM170E01-A4 / TLA1 - LM171W01
	LM190E3 - LC150X01-C3 / X02-A4
CHIMEI	M170E05-L01/04/05/08 -M190A01/E05
AUOPTRONICS	M170XW01-M190EG / EN02

Marca / Brand	Model
PHILIPS	CHASIS LC4.1E AB

Observaciones / Remarks

HR I04L10005



INVERTER ORIGINAL REFER. EQUIVAL.
GH0271
FIF1542-31B
30018343



Dimensiones / size : 160mm x 26mm

Conector Control / Control Connector											
12	11	10	9	8	7	6	5	4	3	2	1
12V	12V	12V	GND	GND	N.C.	GND	GND	on-off	GND	Bri.	GND

LCD panel manuf.	LCD Panel cod.
SAMSUNG	LTM170EU-L01/11/21-LTA150XH-L01 LTM170E4-E5/E6/E8 - LTM170EX-L01
LG-PHILIPS	LC130V01-A2
CHIMEI	M150X3-L04/06 V150X1-L06 / V150X2-T06
SHARP	LQ150X1LW71N
HYDIS	HT15X13-100 / 200

Marca / Brand	Model
PHILIPS	13PF7835

Observaciones / Remarks

HR I04L10007



INVERTER ORIGINAL REFER. EQUIVAL.
GH140A(A1)
GH017
3373400



Dimensiones / size : 158mm x 39mm

Conector Control / Control Connector											
12	11	10	9	8	7	6	5	4	3	2	1
12V	12V	12V	GND	GND	N.C.	GND	GND	on-off	GND	Bri.	GND

LCD panel manuf.	LCD Panel cod.
SAMSUNG	LTM150XH-L01/06A LTM170EU-L01/11/21/25 LTM170XH-L01/06/T01 LTM190M2-L01
CHIMEI	M190E05-L0A/0E
LG-PHILIPS	LM190E05-SL01/03 QD14VL03-01
SHARP	LQ150X1LGB1 - LQ150X1LW71

Marca / Brand	Model
PHILIPS	14PF6826
BEKO	NR17 CD LE3

Observaciones / Remarks
Para GH017 requiere fijacion mediante cinta adhesiva
For use in replacement of GH017 adhesive tape must be used.

HR I04L10010



INVERTER ORIGINAL REFER. EQUIVAL.
GH053A(A6)
FIF1542-02A
FIF1742-07B



Dimensiones / size : 160mm x 26mm

Conector Control / Control Connector											
12	11	10	9	8	7	6	5	4	3	2	1
12V	12V	12V	GND	GND	N.C.	GND	GND	on-off	GND	Bri.	GND

LCD panel manuf.	LCD Panel cod.
SAMSUNG	LTM170EX-L21 - LTM170W1 LTM190EX-L21 / L31 - LTM550V1
LG-PHILIPS	LM190E05-SL01 / 03 - QD14VL03-01 LC151X01-03
AUOPTRONICS	M170EN01/02/03/04-M170EG01/02/04 M190EG01 / 02 / 04 - T150XG01
NEC	170SX01TB
HANNSTAR	HSD190ME12 /13


Marca / Brand	Model
PHILIPS	15FT9955 CHASIS LC 03 E

Observaciones / Remarks

HR I04L10014



INVERTER ORIGINAL REFER. EQUIVAL. FIF1942-67A
--

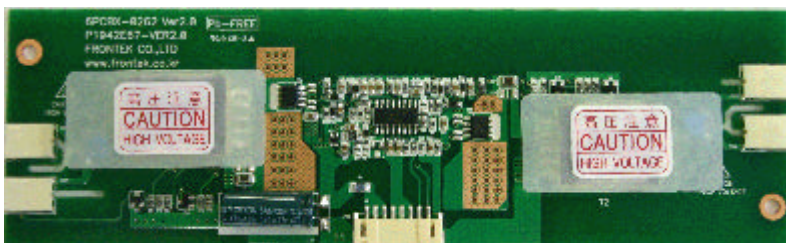

Dimensiones / size : 180mm x 45mm

Conector control / Control connector							
8	7	6	5	4	3	2	1
12V	12V	12V	GND	GND	GND	on-off	Br.

LCD panel manuf.	LCD Panel cod.
SAMSUNG	LTM170EU-L01/11/21/25 LTM170EX-L01 - LTM170E06-L02/04 LTM190EX-L01/05/21/31
HYDIS	HT17E11 / E12 / E13
LG-PHILIPS	LM170E01 / 02 - LM171W01 LM190E03 / 04 / 05 - LC150X02 LM190WX1-TLA1
CHIMEI	M170EG01-V01 M190EN02/03/04 - M190PW01-V0

Marca / Brand	Model

Observaciones / Remarks

HR I06L10001



INVERTER ORIGINAL REFER. EQUIVAL.
FIF1766-31A
GH103A
V30029602



Dimensiones / size : 160mm x 55mm

Conector Control / Control Connector											
1	2	3	4	5	6	7	8	9	10	11	12
12V	12V	12V	GND	GND	N.C.	GND	GND	on-off	GND	Br.	GND

LCD panel manuf.	LCD Panel cod.
LG-PHILIPS	LC171W03-A4 / B3 LM171W03-A04 LC150X01-SL01 / A3

Marca / Brand	Model
JVC	LT17B60 LT17C50 LT17D50 LT17E31


Observaciones / Remarks
Para GH103A deben eliminarse las tres ultimas conexiones (13-14-15) del conector de control.

For use in replacement for GH103A, the last connections (13-14-15) of control cable must be eliminated.

HR I06L10004



INVERTER ORIGINAL REFER. EQUIVAL.
FIF1766-36A
DA3602-01

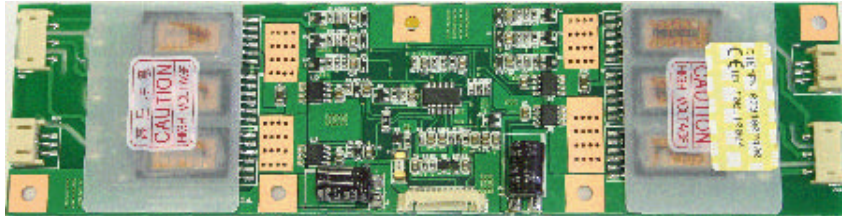

Dimensiones / size : 192mm x 50mm

Conector Control / Control Connector											
1	2	3	4	5	6	7	8	9	10	11	12
12V	12V	12V	GND	GND	N.C.	GND	GND	on-off	GND	Br.	GND

LCD panel manuf.	LCD Panel cod.
LG-PHILIPS	LC150X01- A3 LC150X01- S01


Marca / Brand	Model

Observaciones / Remarks

HR I06L10006



INVERTER ORIGINAL REFER. EQUIVAL.
GH096A
DA2605-01

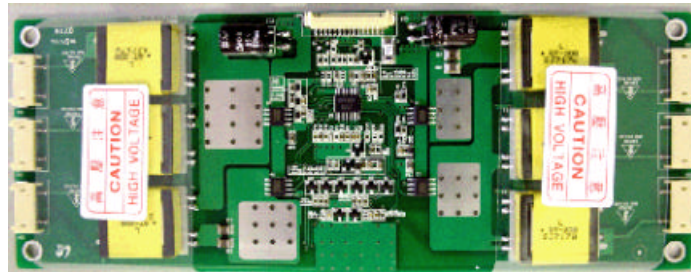

Dimensiones / size : 188mm x 70mm

Conector Control / Control Connector														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
12V	12V	12V	12V	12V	12V	GND	GND	N.C.	GND	GND	on-off	GND	Br.	GND

LCD panel manuf.	LCD Panel cod.
SHARP	LQ190E1LW41
FUJITSU	FLC48SXC8V-05 FLC48SXC8V-12 / F


Marca / Brand	Model
SHARP	

Observaciones / Remarks

HR I06L20001



INVERTER ORIGINAL REFER. EQUIVAL. FIF2066-50A
--

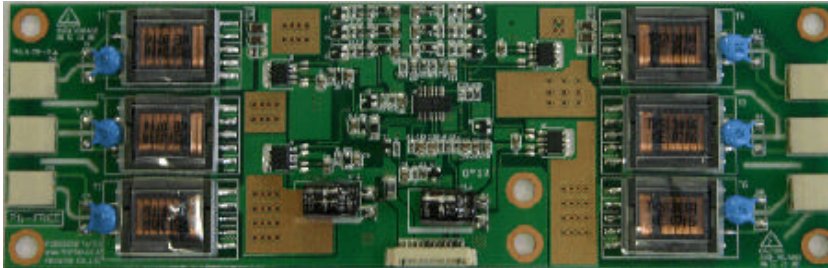

Dimensiones / size : 188mm x 60mm

Conector Control / Control Connector											
12	11	10	9	8	7	6	5	4	3	2	1
12V	12V	12V	GND	GND	GND	GND	GND	on-off	GND	Br.	GND

LCD panel manuf.	LCD Panel cod.
AUOPTRONICS	A201SN02


Marca / Brand	Model

Observaciones / Remarks

HR I06L20002



INVERTER ORIGINAL REFER. EQUIVAL.
GH164A
DA2604-02

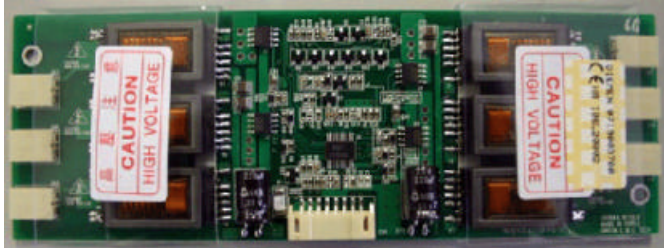

Dimensiones / size : 160mm x 55mm

Conector Control / Control Connector							
1	2	3	4	5	6	7	8
12V	12V	12V	GND	GND	GND	Br.	on-off

LCD panel manuf.	LCD Panel cod.
AUOPTRONICS	A201SN01-V5 - AS201SN02-V4 T200XW02-V0
LG-PHILIPS	LM190E05-SL01 / 03 - QD14VL03-01
CHIMEI	M201V1-T01 - V201V1-T01
NEC	NL128102BC28/29 - NL16010BC27-02
SAMSUNG	V201V1-T01
CHUNGHWA	CLAA201VA07


Marca / Brand	Model
PHILIPS	20PF4121
GRUNDIG	LCD51-4505 LCD51-6605
JVC	LT20E50

Observaciones / Remarks

HR I06L20003



INVERTER ORIGINAL REFER. EQUIVAL. FIF2064-31B
--

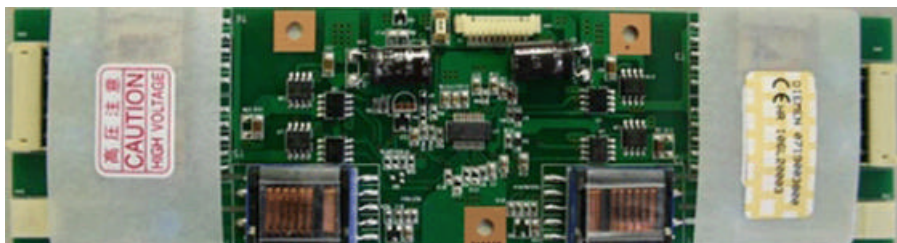

Dimensiones / size : 188mm x 50mm

Conector Control / Control Connector									
1	2	3	4	5	6	7	8	9	10
Br.	N.C.	GND	GND	on-off	12V	GND	GND	12V	12V

LCD panel manuf.	LCD Panel cod.
SAMSUNG	LTM201U1-L01 / LTM201M1-L01 LTM170E4-E5/E6/E8 - LTM170EX-L01
LG-PHILIPS	LM190E01-A4/SL01 LM190E02-B4 - LM190E05-SL02 LM201W01-A5/B5 LC201V2-A3 / SD02


Marca / Brand	Model

Observaciones / Remarks

HR I06L20004



INVERTER ORIGINAL REFER. EQUIVAL.
GH089A
DA6303-01
FIF2066-31A

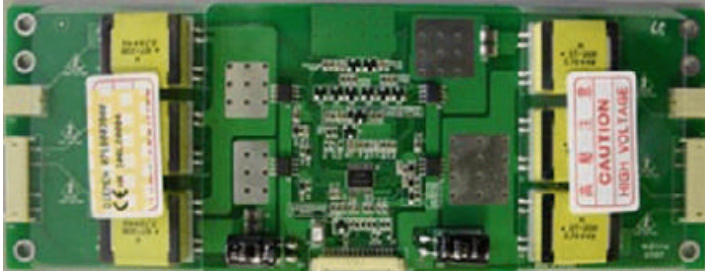

Dimensiones / size : 188mm x 70mm

Conector Control / Control Connector														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
12V	12V	12V	12V	12V	12V	GND	GND	N.C.	GND	GND	on-off	GND	Br.	GND

LCD panel manuf.	LCD Panel cod.
LG-PHILIPS	LC201U02 - LC201V01 / 02 LM201U03/U04 - LM201V02-A3 LM190E01/E05
AUOPTRONICS	M201EW01 - M201UN02
NEC	201VBTB
SAMSUNG	LTM210M2-L01


Marca / Brand	Model
PHILIPS	20PF4121
GRUNDIG	LCD51-4505 LCD51-6605
JVC	LT20E50

Observaciones / Remarks

HR I06L20007



INVERTER ORIGINAL REFER. EQUIVAL.
GH158A
FIF2066-01A

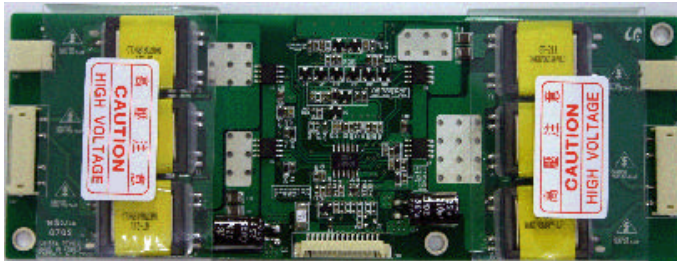

Dimensiones / size : 170mm x 62mm

Conector Control / Control Connector														
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
15V	15V	15V	15V	15V	15V	GND	GND	N.C.	GND	GND	on-off	GND	Br.	GND

LCD panel manuf.	LCD Panel cod.
SAMSUNG	LTM201U1-L01


Marca / Brand	Model

Observaciones / Remarks

HR I06L20009



INVERTER ORIGINAL REFER. EQUIVAL.
FIF2066-51C
FIF2066-51D

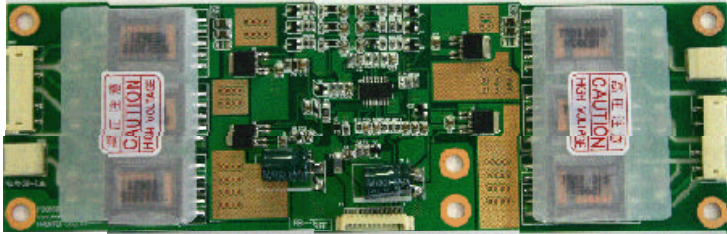

Dimensiones / size : 188mm x 60mm

Conector Control / Control Connector											
12	11	10	9	8	7	6	5	4	3	2	1
15V	15V	15V	GND	GND	GND	GND	GND	on-off	GND	Br.	GND

LCD panel manuf.	LCD Panel cod.
SAMSUNG	LTM213U3 LTM213U4 / U5


Marca / Brand	Model

Observaciones / Remarks

HR I06L20012



INVERTER ORIGINAL REFER. EQUIVAL.
QF131V1.00
30022526
3108743

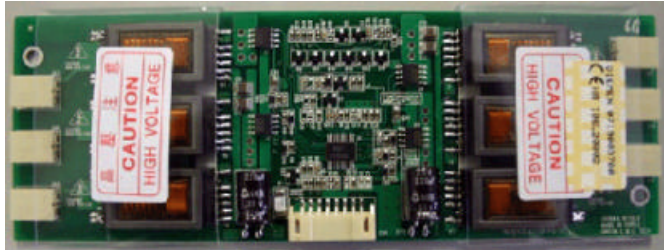

Dimensiones / size : 160mm x 55mm

Conector Control / Control Connector							
1	2	3	4	5	6	7	8
12V	12V	12V	GND	GND	GND	Br.	on-off

LCD panel manuf.	LCD Panel cod.
SAMSUNG	V201V1-T01
AUOPTRONICS	A201SN01 / 02
CHIMEI	V201V1-T01

Marca / Brand	Model
SANYO	CE 20 L01
WELTSTAR	W 20 TFT 20 LF 1T CH.17SC 07-2

Observaciones / Remarks
Se adjuntan instrucciones para colocacion del inverter.
Instructions to place the inverter are attached in the box.

HR I06L20014




INVERTER ORIGINAL REFER. EQUIVAL.

LIVP6009 - 30045614

LVE0321 - 30031727

PLCD0318604

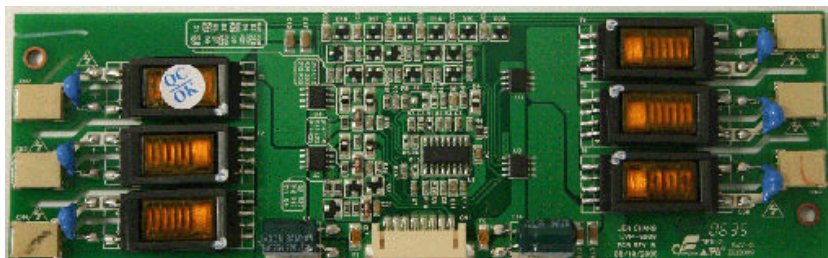

Dimensiones / size : 180mm x 55mm

Conector Control / Control Connector							
1	2	3	4	5	6	7	8
12V	12V	12V	GND	GND	GND	Br.	on-off

LCD panel manuf.	LCD Panel cod.
AUOPTRONICS	A201SN01-V5

Marca / Brand	Model
JVC	LT20E50
VESTEL	LT20A5S


Observaciones / Remarks

HR I06L20015



INVERTER ORIGINAL REFER. EQUIVAL.

LIVP6010 - 30045615

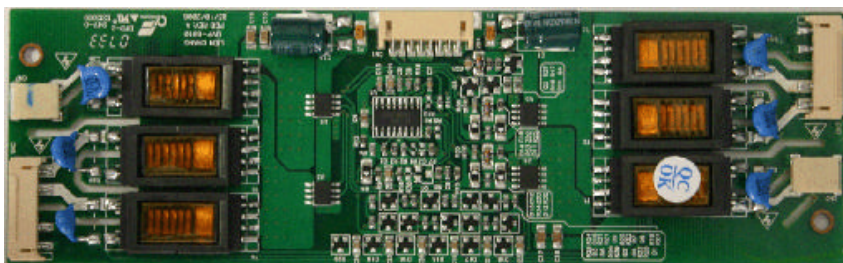

Dimensiones / size : 180mm x 55mm

Conector Control / Control Connector							
1	2	3	4	5	6	7	8
12V	12V	12V	GND	GND	GND	Br.	on-off

LCD panel manuf.	LCD Panel cod.


Marca / Brand	Model
VESTEL	

Observaciones / Remarks

HR I06L20019



INVERTER ORIGINAL REFER. EQUIVAL.
BI2036C

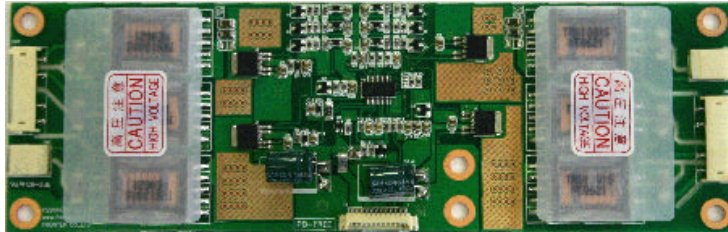

Dimensiones / size : 188mm x 60mm

Conector Control / Control Connector											
12	11	10	9	8	7	6	5	4	3	2	1
15V	15V	15V	GND	GND	GND	GND	GND	on-off	GND	Br.	GND

LCD panel manuf.	LCD Panel cod.
SAMSUNG	V201V1-T01
AUOPTRONICS	A201SN01 / 02
CHIMEI	V201V1-T01

Marca / Brand	Model
SOGO	SS 2002


Observaciones / Remarks
Se adjuntan instrucciones para adaptar conexión cable control inverter original.

Instructions to adapt control cable connection of original inverter included in the box.
--

HR I10L20001



INVERTER ORIGINAL REFER. EQUIVAL.
VIT70008.50
27-D000466
I201B1-24-V02-L1H1

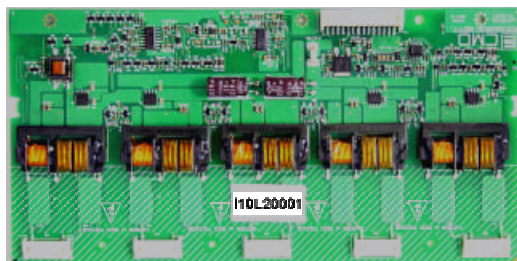

Dimensiones / size : 200mm x 100mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	N.C.	N.C.	Pwm	on-off

LCD panel manuf.	LCD Panel cod.
CHIMEI	V201B1-V02-L1H1


Marca / Brand	Model

Observaciones / Remarks

HR I12L20002



INVERTER ORIGINAL REFER. EQUIVAL. GH151A GH214A BN44-00136A

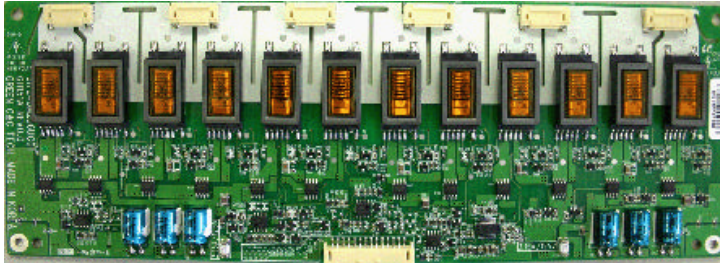

Dimensiones / size : 272mm x 95mm

Conector Control / Control Connector													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	N.C.	on-off	Br.A	Pwm

LCD panel manuf.	LCD Panel cod.
SAMSUNG	LTA240M1-L02 LTM240M1-L01/02 LM240M2-L01/02


Marca / Brand	Model
SAMSUNG	

Observaciones / Remarks

HR I12L20003



INVERTER ORIGINAL REFER. EQUIVAL. GH194A LJ97-00863A
--

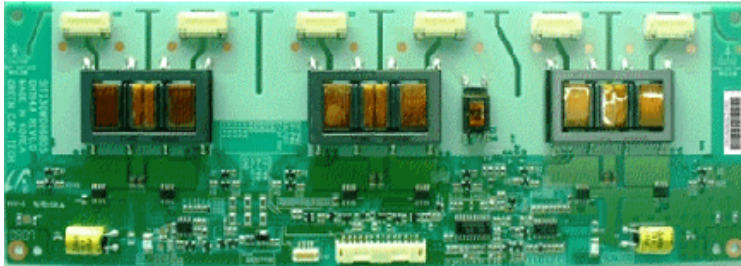

Dimensiones / size : 272mm x 95mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	P.det.	on-off	Br.A	Pwm

CN8			
1	2	3	4
GND	on-off	Br.A	Pwm

LCD panel manuf.	LCD Panel cod.
SAMSUNG	LTA230W-L02 LTA230W1-L02/04/07


Marca / Brand	Model
SAMSUNG	LA23R51B LE23R41B LE23R51B CH. RE23

Observaciones / Remarks

HR I12L20004



INVERTER ORIGINAL REFER. EQUIVAL.
GH199A
LJ97-00942A

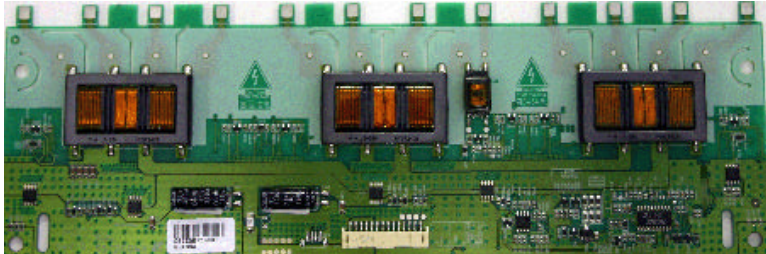

Dimensiones / size : 286mm x 95mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	P.det.	on-off	Br.A	N.C

LCD panel manuf.	LCD Panel cod.
SAMSUNG	LTA260W3-L03 LTM260W3-L03


Marca / Brand	Model
SAMSUNG	

Observaciones / Remarks

HR I12L20005



INVERTER ORIGINAL REFER. EQUIVAL.
GH212A
LJ97-01069A

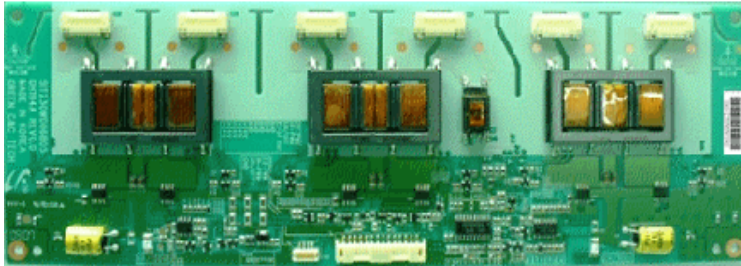

Dimensiones / size : 272mm x 95mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	P.det.	on-off	Br.A	Pwm

CN8			
1	2	3	4
GND	on-off	Br.A	Pwm

LCD panel manuf.	LCD Panel cod.
SAMSUNG	LTA230W2-L01 LTM230W2-L0100R7


Marca / Brand	Model
SAMSUNG	

Observaciones / Remarks

HR I12L20006



INVERTER ORIGINAL REFER. EQUIVAL. FIF2412-32A
--

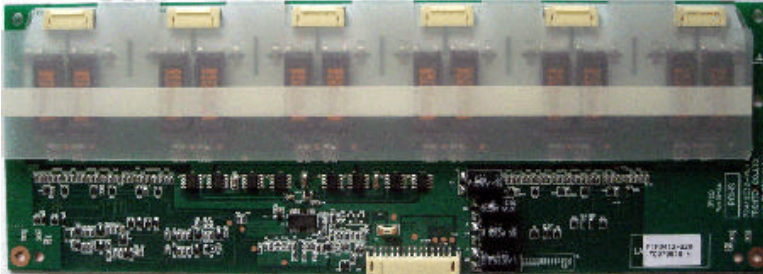

Dimensiones / size : 272mm x 95mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	N.C.	on-off	Br.A	Pwm

LCD panel manuf.	LCD Panel cod.
SAMSUNG	LTM240CT01
	LTM240M1-L01/02- LTM240M2-L02
AUOPTRONICS	M240VW01 - M240J1-L02


Marca / Brand	Model
SAMSUNG	

Observaciones / Remarks

HR I12L20007



INVERTER ORIGINAL REFER. EQUIVAL.
VIT71007.50
19.26006.063

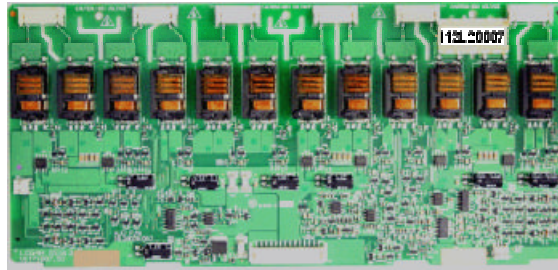

Dimensiones / size : 232mm x 110mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	Br.A	on-off	Pwm	GND

CN2	
1	2
GND	GND

CN3	
1	2
Sinc.	GND

LCD panel manuf.	LCD Panel cod.


Marca / Brand	Model

Observaciones / Remarks

HR I14L20001



INVERTER ORIGINAL REFER. EQUIVAL.
VIT79005.81
19.26006.288

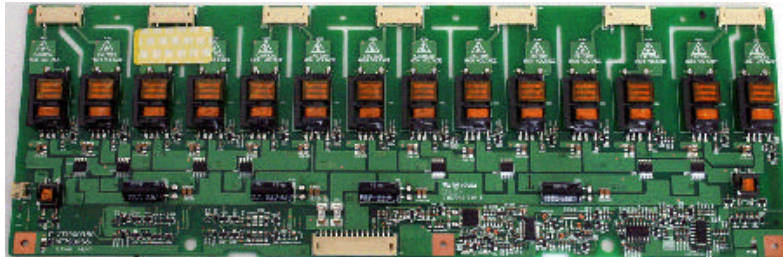

Dimensiones / size : 300mm x 100mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	Br.A	on-off	Pwm	S.Br.

CN9	
1	2
L.ccf1	L.ccf1

LCD panel manuf.	LCD Panel cod.
QDI	V26D3


Marca / Brand	Model

Observaciones / Remarks

HR I14L30001



INVERTER ORIGINAL REFER. EQUIVAL. VIT79002.52 19.26006.286

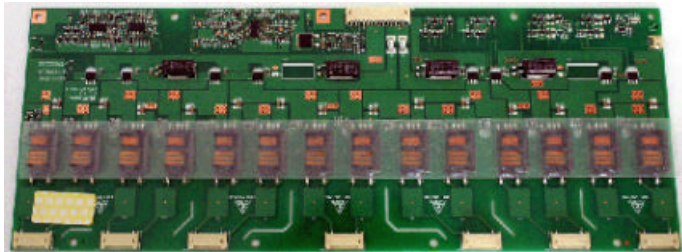

Dimensiones / size : 320mm x 120mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	N.C.	on-off	Br.	GND

CN3	
1	2
L.ccf1	L.ccf1

LCD panel manuf.	LCD Panel cod.
QDI	V32C5 V32C1-CD


Marca / Brand	Model

Observaciones / Remarks

HR I14L30002



INVERTER ORIGINAL REFER. EQUIVAL.
VIT79002.62
19.26006.137

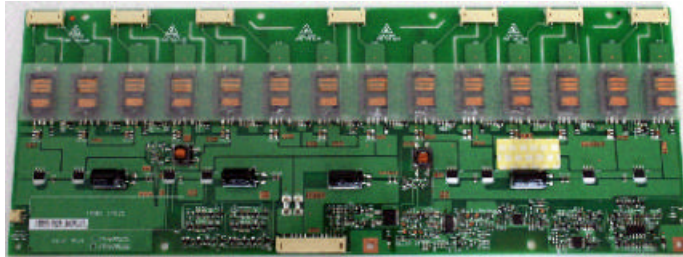

Dimensiones / size : 320mm x 120mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	N.C.	on-off	Br.	GND

CN3	
1	2
L.ccf1	L.ccf1

LCD panel manuf.	LCD Panel cod.
QDI	V32C5 V32C1-CD


Marca / Brand	Model

Observaciones / Remarks

HR I16L20001



INVERTER ORIGINAL REFER. EQUIVAL.
GH178A
LJ97-01069A

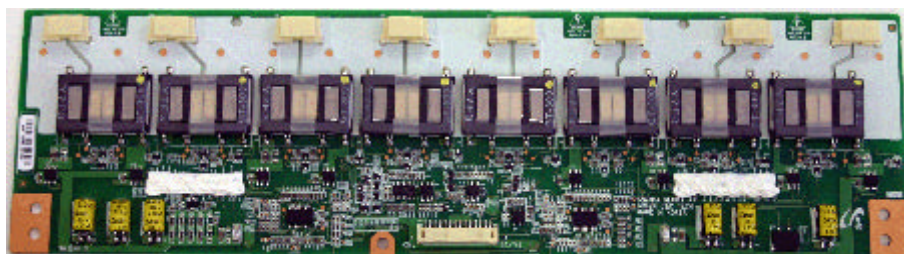

Dimensiones / size : 360mm x 100mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	N.C.	on-off	Br.	St.L

CN2	
1	2
Br/Ctr	GND

LCD panel manuf.	LCD Panel cod.
SAMSUNG	LTM270M1-L01


Marca / Brand	Model
SAMSUNG	

Observaciones / Remarks

HR I16L20002



INVERTER ORIGINAL REFER. EQUIVAL. VIT71008.90 19.26006.111

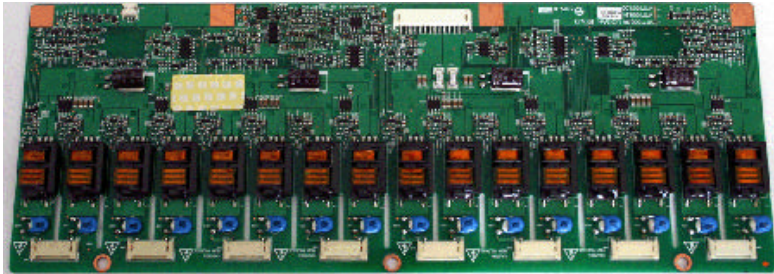

Dimensiones / size : 300mm x 110mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	Br.A	on-off	Pwm	GND

CN2	
1	2
Sinc.	GND

LCD panel manuf.	LCD Panel cod.
AUOPTRONICS	T260XW02


Marca / Brand	Model

Observaciones / Remarks

HR I16L20003



INVERTER ORIGINAL REFER. EQUIVAL. VIT71008.91 19.26006.167

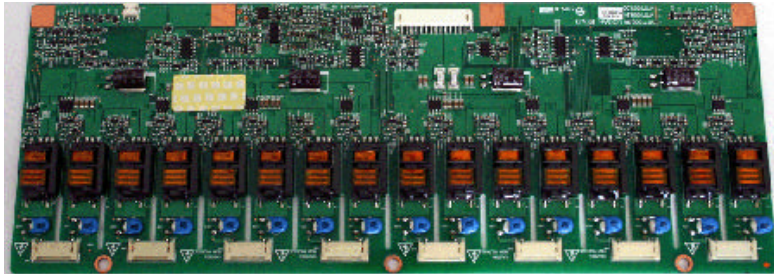

Dimensiones / size : 300mm x 110mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	Br.A	on-off	Pwm	GND

CN2	
1	2
Sinc.	GND

LCD panel manuf.	LCD Panel cod.
SAMSUNG	T260XW02


Marca / Brand	Model
SAMSUNG	LN-S 2641D

Observaciones / Remarks

HR I16L20004



INVERTER ORIGINAL REFER. EQUIVAL. VIT71008.92 19.26006.187

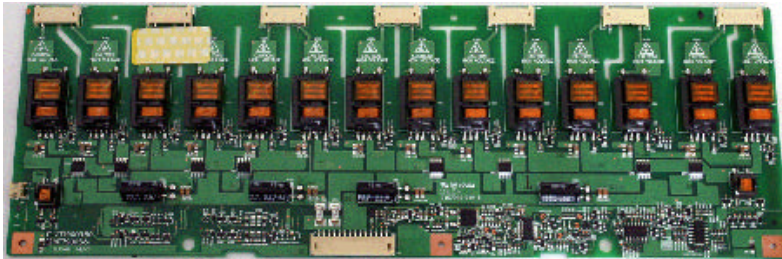

Dimensiones / size : 300mm x 110mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	Br.A	on-off	Pwm	GND

CN2	
1	2
Sinc.	GND

LCD panel manuf.	LCD Panel cod.
AUOPTRONICS	T260XW02

Marca / Brand	Model

Observaciones / Remarks

HR I16L30001



INVERTER ORIGINAL REFER. EQUIVAL.
GH169A
GH169C
LJ97-01265A



Dimensiones / size : 360mm x 110mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	N.C.	on-off	Br.	St.L

LCD panel manuf.	LCD Panel cod.
SAMSUNG	LTM300M1-P01


Marca / Brand	Model
SAMSUNG	

Observaciones / Remarks

HR I16L30004



INVERTER ORIGINAL REFER. EQUIVAL. VIT79001.52 19.26006.301

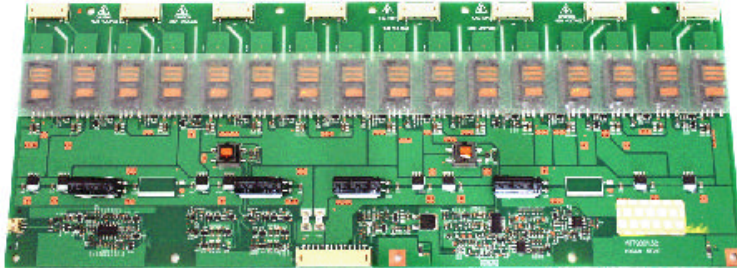

Dimensiones / size : 320mm x 120mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	N.C.	on-off	Br.	GND

CN3	
1	2
L.cfl	L.cfl

LCD panel manuf.	LCD Panel cod.
QDI	V32C1 V32D2


Marca / Brand	Model

Observaciones / Remarks

HR I16L30005



INVERTER ORIGINAL REFER. EQUIVAL. VIT68001.80 632133718 4H.V1448.451/C1

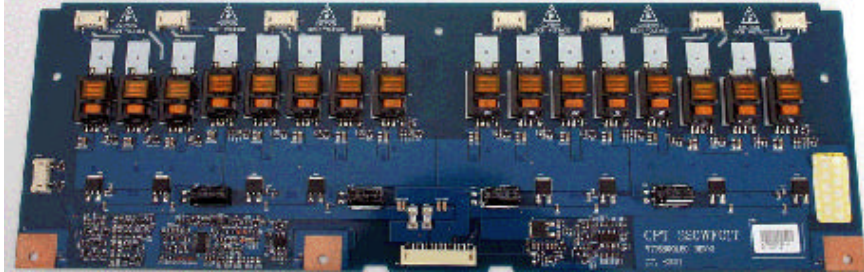

Dimensiones / size : 370mm x 120mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	Br.an.	on-off	Br.pw	Sel.

CN10	
1	2
L.cfl	L.cfl

LCD panel manuf.	LCD Panel cod.
CHUNGHWA	CLAA320WF01T CLAA320WB02S


Marca / Brand	Model
SAMSUNG	LE32S62B

Observaciones / Remarks

HR I16L30006



INVERTER ORIGINAL REFER. EQUIVAL.
VIT68004.70
704100395
4H.V1838.491/B1

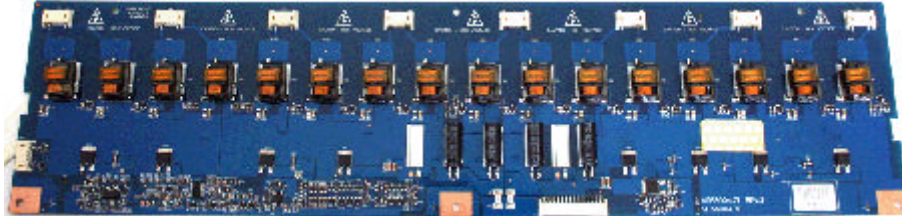

Dimensiones / size : 430mm x 105mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	Br.an.	on-off	Br.pw	Sel.

CN10	
1	2
L.cfl	L.cfl

LCD panel manuf.	LCD Panel cod.
CHUNGHWA	CLAA370WF01 CLAA370WA03S


Marca / Brand	Model
SAMSUNG	LE37S62B

Observaciones / Remarks

HR I18L30001



INVERTER ORIGINAL REFER. EQUIVAL.
VIT79006.60
19.26006.294

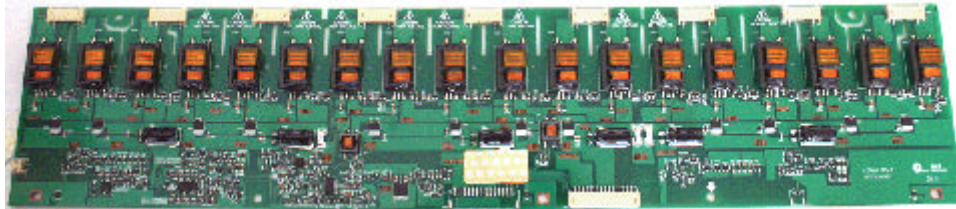

Dimensiones / size : 446mm x 95mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	Br.an.	on-off	Br.pw	Sel.

CN11	
1	2
GND	Sinc.

LCD panel manuf.	LCD Panel cod.
AUOPTRONICS	V370A1


Marca / Brand	Model

Observaciones / Remarks

HR I20L30001



INVERTER ORIGINAL REFER. EQUIVAL.
VIT71010.53
19.26006.146

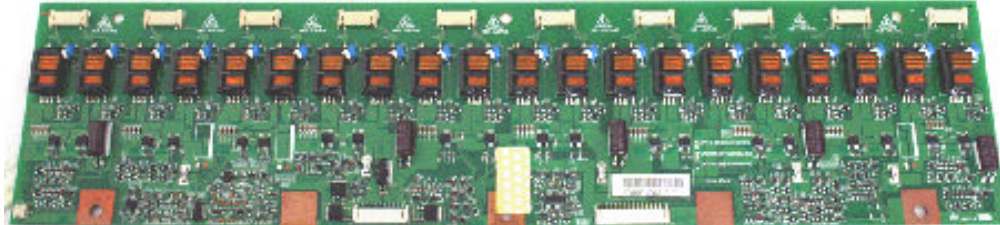

Dimensiones / size : 446mm x 105mm

Conector Control / Control Connector CN1									
1	2	3	4	5	6	7	8	9	10
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND

Conector Control / Control Connector CN2													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	Br.an.	on-off	Br.pw	Sel.

CN14	
1	2
GND	GND

LCD panel manuf.	LCD Panel cod.
AUOPTRONICS	T370XW01


Marca / Brand	Model

Observaciones / Remarks

HR I20L30002



INVERTER ORIGINAL REFER. EQUIVAL.
VIT70006.60
27-D005816
1370H1-24A-V00-L1E0

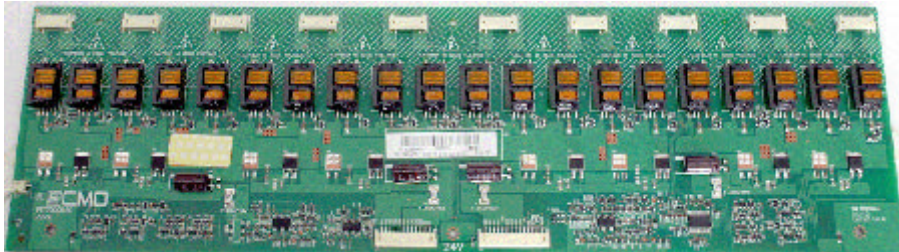

Dimensiones / size : 420mm x 120mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	Sel.	E.pw.	I.pw.	on-off

Conector Control / Connector Control CN2												
1	2	3	4	5	6	7	8	9	10	11	12	
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	N.C.	N.C.	

CN13	
1	2
L.ccf1	L.ccf1

LCD panel manuf.	LCD Panel cod.
CHIMEI	T370H1-24A


Marca / Brand	Model

Observaciones / Remarks

HR I20L30003



INVERTER ORIGINAL REFER. EQUIVAL. VIT70006.80 27-D015041 I370H2-24A-V01 / I370H1-20B-L001A
--

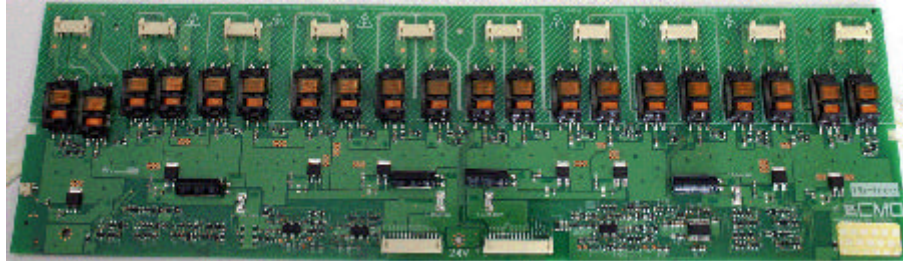

Dimensiones / size : 430mm x 125mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	Sel.	E.pw.	I.pw.	on-off

Conector Control / Connector Control CN2												
1	2	3	4	5	6	7	8	9	10	11	12	
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	N.C.	N.C.	

CN13	
1	2
L.ccf1	L.ccf1

LCD panel manuf.	LCD Panel cod.
CHIMEI	V370H1-L0A


Marca / Brand	Model

Observaciones / Remarks

HR I20L40001



INVERTER ORIGINAL REFER. EQUIVAL.
VIT70023.50/51
27-D005861
I420H1-L24-V01-L2D0

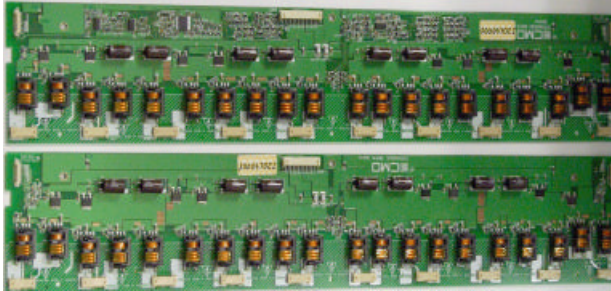

Dimensiones / size : 480mm x 100mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	Sel.	E.pw.	I.pw.	on-off

Conector Control / Connector Control CN2											
1	2	3	4	5	6	7	8	9	10	11	12
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	N.C.	N.C.

LCD panel manuf.	LCD Panel cod.
CHIMEI	V420H1-L24


Marca / Brand	Model

Observaciones / Remarks

HR I20L40002



INVERTER ORIGINAL REFER. EQUIVAL. VIT70023.60/61 27-D013345 I420H1-20C-L001A
--

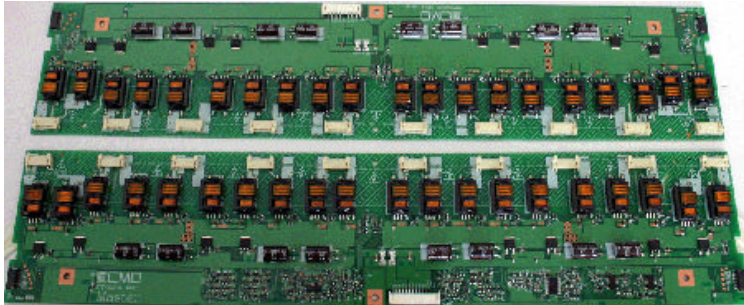

Dimensiones / size : 480mm x 100mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	Sel.	E.pw.	I.pw.	on-off

Conector Control / Connector Control CN2											
1	2	3	4	5	6	7	8	9	10	11	12
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	N.C.	N.C.

LCD panel manuf.	LCD Panel cod.
CHIMEI	V420H1-L05


Marca / Brand	Model

Observaciones / Remarks

HR I20L40003



INVERTER ORIGINAL REFER. EQUIVAL. VIT70023.70/71 I420H1-20A-L201C 27-D010638
--

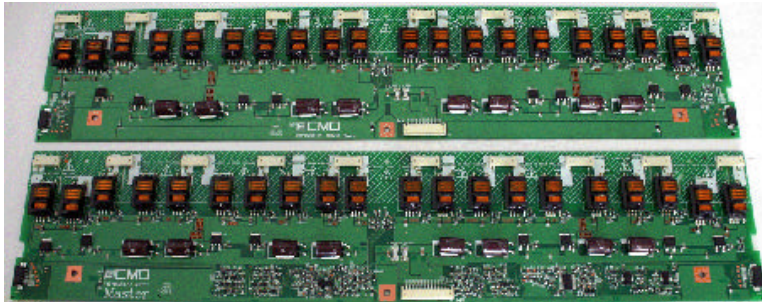

Dimensiones / size : 480mm x 100mm

Conector Control / Control Connector CN1													
1	2	3	4	5	6	7	8	9	10	11	12	13	14
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	Sel.	E.pw.	I.pw.	on-off

Conector Control / Connector Control CN2												
1	2	3	4	5	6	7	8	9	10	11	12	
24V	24V	24V	24V	24V	GND	GND	GND	GND	GND	N.C.	N.C.	

LCD panel manuf.	LCD Panel cod.
CHIMEI	V420H1

Marca / Brand	Model

Observaciones / Remarks

HR IP2L100001



INVERTER ORIGINAL REFER. EQUIVAL.
AI-0021A
3138 188 79062



Dimensiones / size : 150mm x 125mm

Conector Control / Control Connector CN001									
1	2	3	4	5	6	7	8	9	10
GND	Br.	on-off	P. Id.	N.C	GND	12V	GND	3,3V	3,3V

JACK 001		
1	2	3
12V	GND	GND

LCD panel manuf.	LCD Panel cod.
LG-PHILIPS	
CHUNGHWA	
HANNSTAR	

Marca / Brand	Model

Observaciones / Remarks

HR IP2L100002



INVERTER ORIGINAL REFER. EQUIVAL.
AI-0067A
3138 198 74361



Dimensiones / size : 135mm x 115mm

Conector Control / Control Connector CON101										
1	2	3	4	5	6	7	8	9	10	11
GND	Br.	on-off	P. Id.	GND	12V	12V	GND	3,3V	3,3V	GND

LCD panel manuf.	LCD Panel cod.
LG-PHILIPS	
CHUNGHWA	
HANNSTAR	


Marca / Brand	Model

Observaciones / Remarks

HR IP2L10003



INVERTER ORIGINAL REFER. EQUIVAL. AI-0097 3138 198 76371

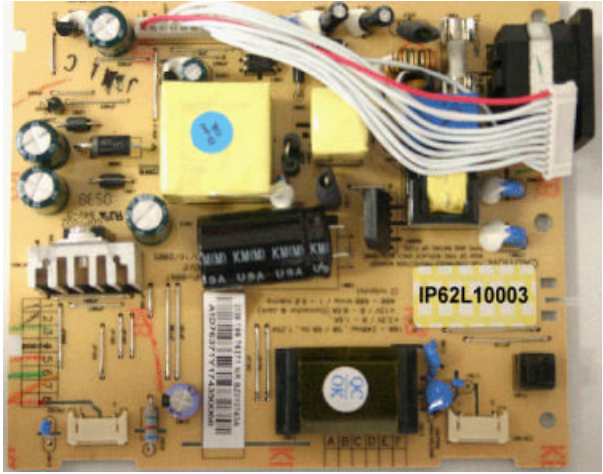

Dimensiones / size : 135mm x 115mm

Conector Control / Control Connector CON101										
1	2	3	4	5	6	7	8	9	10	11
GND	Br.	on-off	P. Id.	GND	12V	12V	GND	3,3V	3,3V	GND

LCD panel manuf.	LCD Panel cod.
LG-PHILIPS	
CHUNGHWA	
HANNSTAR	

Marca / Brand	Model

Observaciones / Remarks


HR IP4L100001



INVERTER ORIGINAL REFER. EQUIVAL.

AIP-0093

3138 198 75863

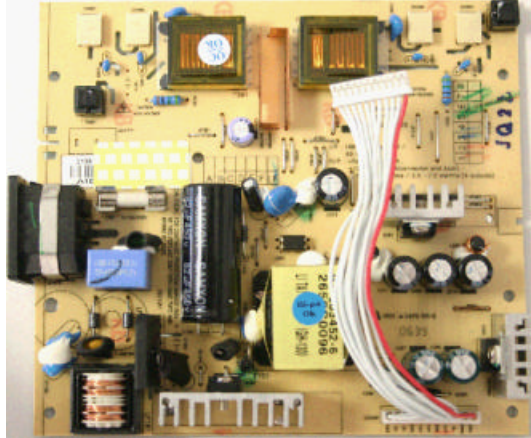

Dimensiones / size : 150mm x 135mm

Conector Control / Control Connector CON301										
1	2	3	4	5	6	7	8	9	10	11
GND	Br.pw	BL	on-off	GND	12V	12V	GND	5V	5V	GND

LCD panel manuf.	LCD Panel cod.
LG-PHILIPS	


Marca / Brand	Model
PHILIPS	

Observaciones / Remarks

HR IP4L100002



INVERTER ORIGINAL REFER. EQUIVAL.
AIP-0095
FE572A306A0001

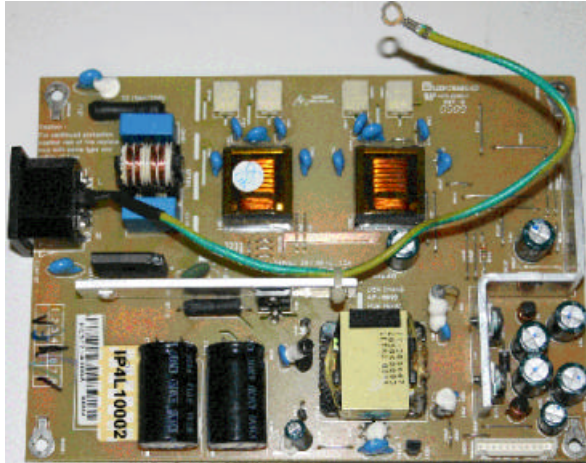

Dimensiones / size : 173mm x 125mm

Conector Control / Control Connector CN303										
1	2	3	4	5	6	7	8	9	10	11
Br.A	Br.pw	on-off	N.C.	GND	5V	5V	GND	GND	12V	12V

LCD panel manuf.	LCD Panel cod.
LG-PHILIPS	


Marca / Brand	Model
LG	

Observaciones / Remarks

HR IP4L100006



INVERTER ORIGINAL REFER. EQUIVAL.
AI-0031F
FE5319C249G0885

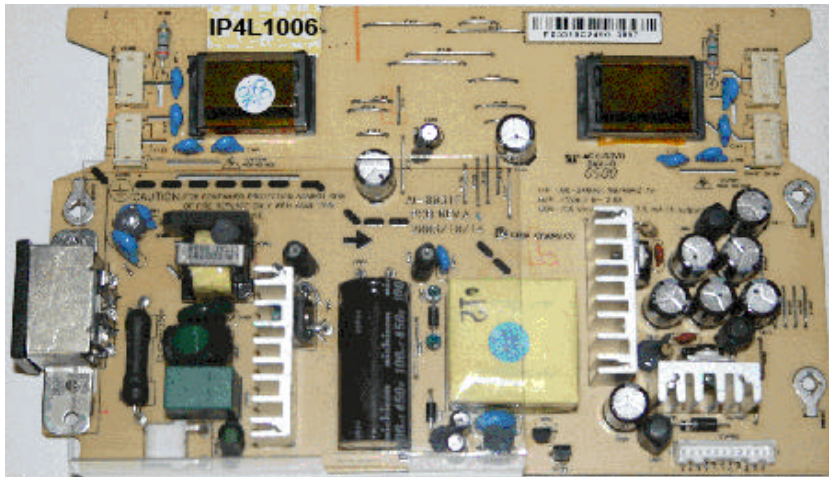

Dimensiones / size : 198mm x 123mm

Conector Control / Control Connector CON002										
1	2	3	4	5	6	7	8	9	10	11
12V	12V	GND	GND	5V	5V	GND	5V	on-off	Br. A	N.C.

LCD panel manuf.	LCD Panel cod.
LG-PHILIPS	


Marca / Brand	Model
LG VESTEL	

Observaciones / Remarks

HR IP4L100007



INVERTER ORIGINAL REFER. EQUIVAL. AIP-0105N FE6427A324N0406
--

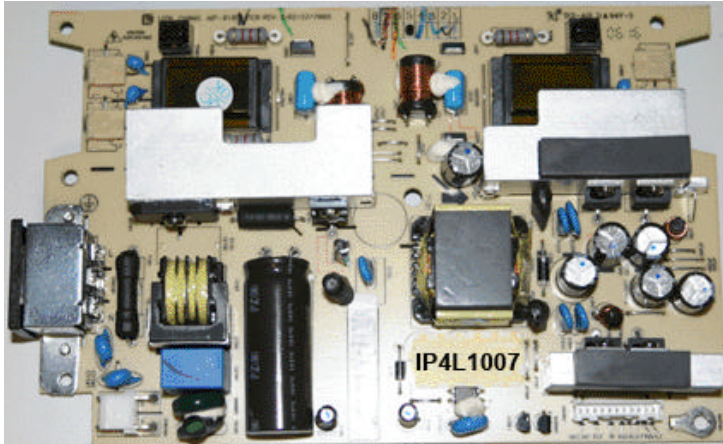

Dimensiones / size : 188mm x 123mm

Conector Control / Control Connector CON002										
1	2	3	4	5	6	7	8	9	10	11
12V	12V	GND	GND	5V	5V	GND	5V	on-off	Br.pw	Br.A

LCD panel manuf.	LCD Panel cod.
LG-PHILIPS	


Marca / Brand	Model
LG VESTEL	

Observaciones / Remarks

HR IP6L20001



INVERTER ORIGINAL REFER. EQUIVAL. AIV-0001A FE7025O280K1075
--

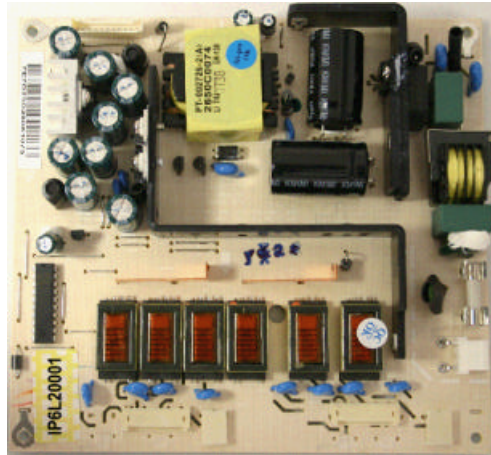

Dimensiones / size : 156mm x 145mm

Conector Control / Control Connector CON202										
1	2	3	4	5	6	7	8	9	10	11
15V	15V	GND	GND	5V	5V	GND	N.C.	on-off	Br.A	ILC

LCD panel manuf.	LCD Panel cod.
LG-PHILIPS	


Marca / Brand	Model
PHILIPS	

Observaciones / Remarks

HR IP6L20002



INVERTER ORIGINAL REFER. EQUIVAL.
AIVP-0010
FE5N02C319A

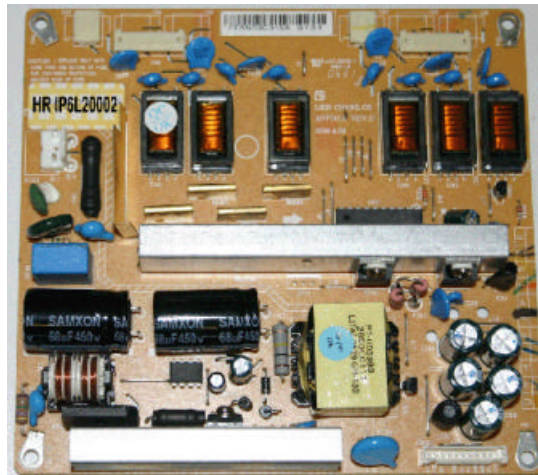

Dimensiones / size : 156mm x 145mm

Conector Control / Control Connector CW201										
1	2	3	4	5	6	7	8	9	10	11
15V	15V	GND	GND	5V	5V	GND	N.C.	on-off	Br.pw	Br.A

LCD panel manuf.	LCD Panel cod.
LG-PHILIPS	


Marca / Brand	Model
LG	

Observaciones / Remarks

HR IP6L200003



INVERTER ORIGINAL REFER. EQUIVAL.
AIVP-0026
AIVP-0026C
30057403
30051308

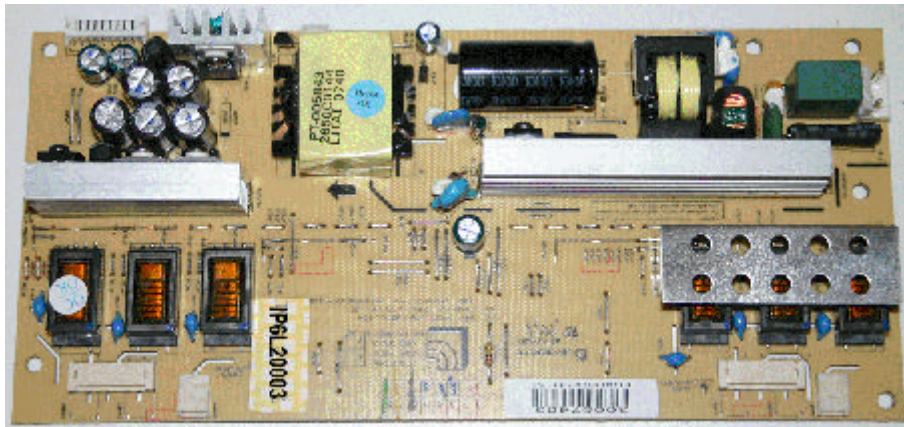

Dimensiones / size : 230mm x 105mm

Conector Control / Control Connector CN201									
1	2	3	4	5	6	7	8	9	10
5V	5V	GND	GND	GND	GND	12V	12V	on-off	Br. A

LCD panel manuf.	LCD Panel cod.
LG-PHILIPS	
SAMSUNG	


Marca / Brand	Model
SANYO	CE20LD51C
VESTEL	CH.17MB24-3

Observaciones / Remarks

HR IP6L200004



INVERTER ORIGINAL REFER. EQUIVAL.
AIVP-0006C
FE6406A280G0179

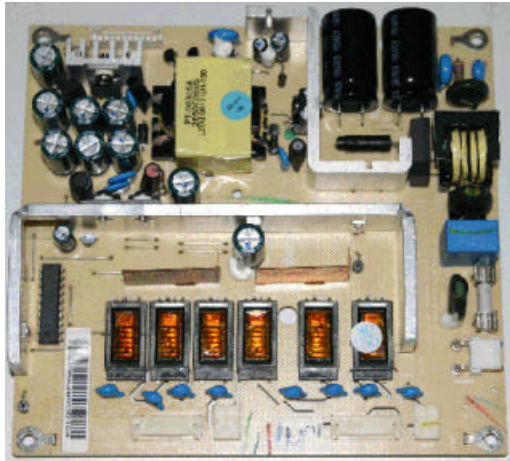

Dimensiones / size : 156mm x 145mm

Conector Control / Control Connector CON202										
1	2	3	4	5	6	7	8	9	10	11
15V	15V	GND	GND	5V	5V	GND	N.C.	on-off	Br.pw	Br.A

LCD panel manuf.	LCD Panel cod.
LG-PHILIPS	


Marca / Brand	Model
LG	

Observaciones / Remarks

HR IP6L200005



INVERTER ORIGINAL REFER. EQUIVAL.
AIV-0009A
FE7026N280Q0161

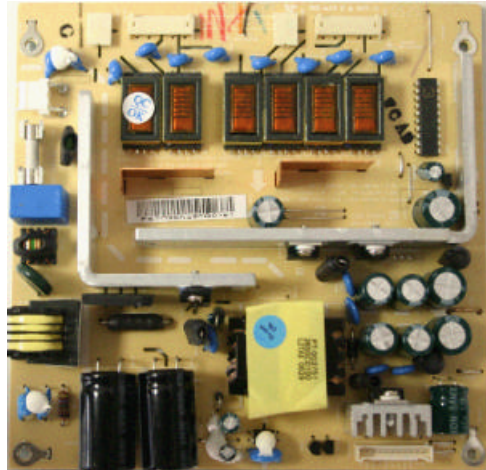

Dimensiones / size : 156mm x 155mm

Conector Control / Control Connector CON202										
1	2	3	4	5	6	7	8	9	10	11
15V	15V	GND	GND	5V	5V	GND	N.C.	on-off	Br.A	ILC

LCD panel manuf.	LCD Panel cod.
LG-PHILIPS	


Marca / Brand	Model
PHILIPS	

Observaciones / Remarks

HR IP6L200006



INVERTER ORIGINAL REFER. EQUIVAL.
AIVP-0032A
E7ND0326364020033

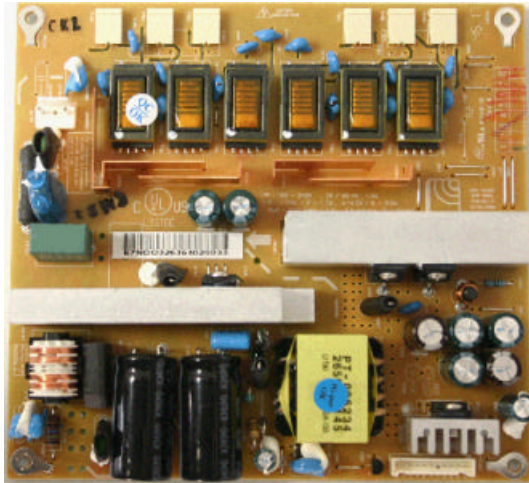

Dimensiones / size : 156mm x 145mm

Conector Control / Control Connector CON202										
1	2	3	4	5	6	7	8	9	10	11
15V	15V	GND	GND	5V	5V	GND	N.C.	on-off	Br.A	ILC

LCD panel manuf.	LCD Panel cod.
LG-PHILIPS	


Marca / Brand	Model
VESTEL	

Observaciones / Remarks

HR IP6L200009



INVERTER ORIGINAL REFER. EQUIVAL. AIP-0110A FE7425A325A0013
--

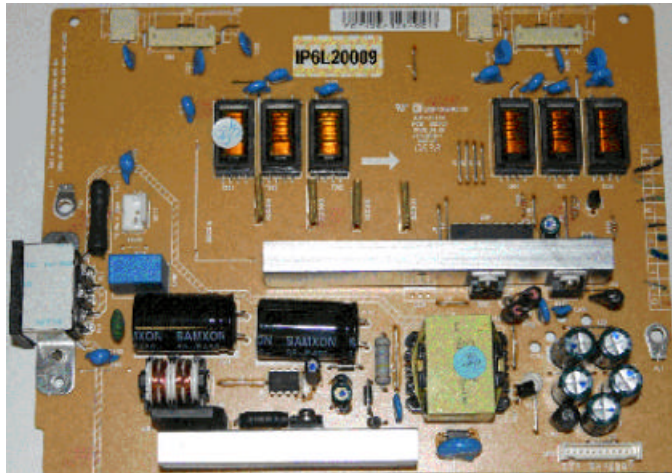

Dimensiones / size : 2000mm x 155mm

Conector Control / Control Connector CW201										
1	2	3	4	5	6	7	8	9	10	11
15V	15V	GND	GND	5V	5V	GND	N.C.	on-off	Br.pw	Br.A

LCD panel manuf.	LCD Panel cod.
LG-PHILIPS	


Marca / Brand	Model
LG	

Observaciones / Remarks

HR IP16L30001



INVERTER ORIGINAL REFER. EQUIVAL. AIVP0035A 30053669

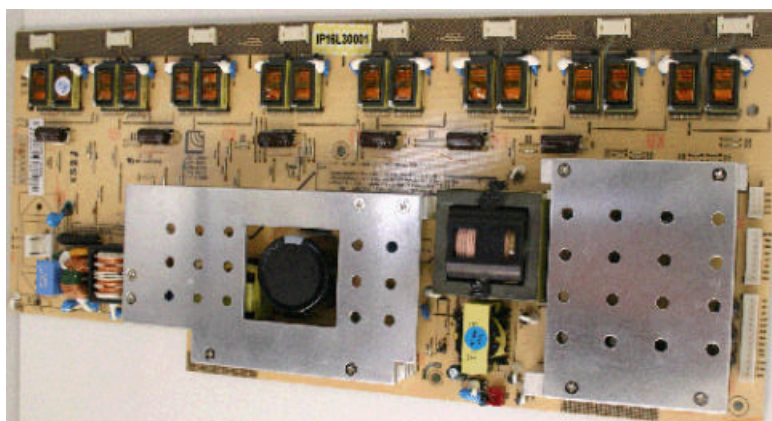

Dimensiones / size : 382mm x 170mm

Conector Control / Control Connector CN4												
1	2	3	4	5	6	7	8	9	10	11	12	13
5V	5V	5V	3,3V	3,3V	3,3V	GND	GND	GND	GND	3,3V	3,3V	5V

Conector Control / Control Connector CN3							
1	2	3	4	5	6	7	8
on-off	Br.A	Br pw	33V	12V	12V	GND	GND

CN2			
1	2	3	4
GND	GND	24V	24V

LCD panel manuf.	LCD Panel cod.
AUOPTRONICS CHUNGHWA	

Marca / Brand	Model

Observaciones / Remarks